

BT Shank Drill Chuck Arbor

Brief introduction

BT Drill Chuck Arbors Milling Machine Tool Holder, The connecting rod is mainly used for drilling and milling machine used in drill chuck, generally used for lathe, milling machine, machining center machine etc.. Connecting rod using the alloy structure steel, the hardness reached 58-62 degrees, the speed of up to 12000 rpm

Specifications

1. Model: BT30/40/50

2. Material: 20CrMnTi

3. Hardened: HRC58-62

4. Run out is less than 0.005mm

5. Tool holders arrange cover BT30/40/50, CAT30/40/50, DIN69871A30, 40, 50

6. Three kinds of cooling A: without cooling supply AD: central cooling supply AD/B: central cooling supply and with internal coolant through the collar

7. Balanced tool holder available G6.3=12000rpm G2.5=20000rpm

8. Suitable Facing Cutter: 13mm-50mm

Model No.	L2	L1	D	D1	Drawbar thread	Wt(kg)
BT-NO.s-L1						
BT30-J1-45	16.669	110	9.754	31.75	M12	0.60
BT30-J2-45	22.225	115.6	14.199	31.75	M12	0.70
BT30-J3-45	30.956	124.4	20.599	31.75	M12	0.80
BT30-J6-45	25.4	118.8	17.170	31.75	M12	0.75
BT30-J33-45	25.4	118.8	15.850	31.75	M12	0.75
BT30-B10-45	14.5	107.9	10.094	31.75	M12	0.60
BT30-B12-45	18.5	111.9	12.065	31.75	M12	0.60
BT30-B16-45	24	117.4	15.733	31.75	M12	0.70
BT30-B18-45	32	125.4	17.780	31.75	M12	0.82
BT40-J1-45	16.669	127.1	9.754	44.45	M16	1.15
BT40-J2-45	22.225	132.6	14.199	44.45	M16	1.25
BT40-J2S-45	19.05	129.4	13.940	44.45	M16	1.20
BT40-J3-45	30.956	141.4	20.599	44.45	M16	1.45
BT40-J4-45	42.069	152.5	28.550	44.45	M16	1.55
BT40-J5-45	47.625	158	35.890	44.45	M16	1.60
BT40-J6-45	25.4	135.8	17.170	44.45	M16	1.30

BT40-J33-45	25.4	135.8	15.850	44.45	M16	1.30
BT40-B10-45	14.5	124.9	10.094	44.45	M16	1.40
BT40-B10-120	14.5	199.9	10.094	44.45	M16	1.76
BT40-B12-45	18.5	128.9	12.065	44.45	M16	1.34
BT40-B16-32	24	121.4	15.733	44.45	M16	1.40
BT40-B16-45	24	134.4	15.733	44.45	M16	1.45
BT40-B16-75	24	164.4	15.733	44.45	M16	1.55
BT40-B16-90	24	179.4	15.733	44.45	M16	1.40
BT40-B18-45	32	142.4	17.780	44.45	M16	1.70
BT40-B18-75	32	172.4	17.780	44.45	M16	1.76
BT50-J1-45	16.669	163.5	9.754	69.85	M24	3.60
BT50-J2-45	22.225	169	14.199	69.85	M24	3.95
BT50-J2S-45	19.05	165.9	13.940	69.85	M24	3.90
BT50-J3-45	30.956	177.8	20.599	69.85	M24	3.70
BT50-J4-45	42.069	188.9	28.550	69.85	M24	3.75
BT50-J5-45	47.625	194.4	35.890	69.85	M24	3.80
BT50-J6-45	25.4	172.2	17.170	69.85	M24	4.00
BT50-J33-45	25.4	172.2	15.850	69.85	M24	4.00
BT50-B10-45	14.5	161.3	10.094	69.85	M24	3.60
BT50-B10-100	14.5	216.3	10.094	69.85	M24	3.80
BT50-B12-45	18.5	165.3	12.065	69.85	M24	3.60
BT50-B16-45	24	170.8	15.733	69.85	M24	3.65
BT50-B16-60	24	185.8	15.733	69.85	M24	3.70
BT50-B16-75	24	200.8	15.733	69.85	M24	3.74
BT50-B16-90	24	215.8	15.733	69.85	M24	3.78
BT50-B18-45	32	178.8	17.780	69.85	M24	3.70

FAQ

1.What kind of characteristic of your company?

We are both manufacturer and exporter.

2.Can you supply samples?

Yes,we can.

3.Can you produce products according to our requirement?

Yes,we can.

4. About Shipping

Port:	Shanghai/Ningbo/Guangzhou/Shenzhen/Hongkong	
Shipping :	By Air, By Sea or By Express	
Shipping Time :	4-10days By Express	Different Area will spend different shipping days
	7-15days By Air	

	25-55days By Sea
Trade Terms	FOB, CIF, EXW, CFR, DDU...


5. product warranty

One year warranty

6.What's your payment terms?

FOB,T/T,CIF.

BT 钻夹头接杆 BT Drill Chuck Arbors

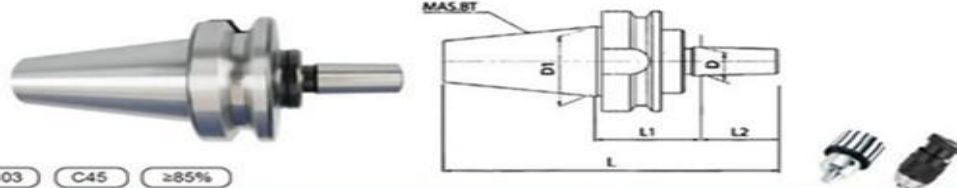

Model	L2	L	D	D1	M
BT30-JT2-45	22.225	115.6	14.199	31.75	M12
BT30-JT3-45	30.956	124.4	20.599	31.75	M12
BT30-JT33-40	25.4	113.8	15.850	31.75	M12
BT30-JT33-45	25.4	118.8	15.850	31.75	M12
BT30-B10-45	14.5	107.9	10.094	31.75	M12
BT30-B12-45	18.5	111.9	12.065	31.75	M12
BT30-B16-45	24	117.4	15.733	31.75	M12
BT30-B18-45	32	125.4	17.780	31.75	M12
BT40-JT2-45	22.225	132.6	14.199	44.45	M16
BT40-JT3-45	30.956	141.4	20.599	44.45	M16
BT40-J33-45	25.4	135.8	15.850	44.45	M16
BT40-B10-45	14.5	124.9	10.094	44.45	M16
BT40-B10-120	14.5	199.9	10.094	44.45	M16
BT40-B12-45	18.5	128.9	12.065	44.45	M16
BT40-B16-32	24	131.4	15.733	44.45	M16
BT40-B16-45	24	134.4	15.733	44.45	M16
BT40-B16-75	24	164.4	15.733	44.45	M16
BT40-B16-90	24	179.4	15.733	44.45	M16
BT40-B18-45	32	142.4	15.733	44.45	M16
BT40-B18-75	32	172.4	17.780	44.45	M16
BT45-B16-90	24	196.8	17.780	44.45	M16
BT45-B16-100	24	206.8	15.733	51.75	M16
BT50-JT3-45	30.956	177.8	20.599	69.85	M24
BT50-JT4-45	42.069	188.9	28.550	69.85	M24
BT50-JT33-45	25.4	172.2	15.850	69.85	M24
BT50-B16-45	24	170.8	15.733	69.85	M24
BT50-B16-60	24	185.8	15.733	69.85	M24
BT50-B16-75	24	200.8	15.733	69.85	M24
BT50-B16-90	24	215.8	15.733	69.85	M24
BT50-B18-45	32	178.8	17.780	69.85	M24