

BT-APU Drill Chuck

Brief introduction

BT/APU Drill Chuck With High Precision 0.05mm, Application range: clip diameter: 0.5-16mm bit .Mechanical spindle and cutting tools and other accessories.High Precision BT shank Tool Holder ,balanced G6.3 or G2.5 For choose.

Specifications

Product Name: APU drill chuck

Product model: BT40-APU

Material: high quality carburizing alloy steel, blackening and fine grinding taper tolerance grade: < AT3

Hard: 56-58 HRC

Carburizing depth: 0.8mm + 0.2mm

Maximum beat: <0.005mm=5um

Surface roughness: Ra<0.005mm

Model	Range	L	Drawbar T
BT30-APU13-110	1-13mm	110	M12
BT40-APU13-110	1-13mm	110	M16
BT40-APU16-110	1-16mm	110	M16
BT50-APU13-110	1-13mm	110	7/16"
BT50-APU16-130	1-16mm	130	7/16"
R8 APU13 M12	1-13mm	90	M12
MT2 APU13 M10	1-13mm	90	M10
MT2 APU13 M12	1-13mm	130	M12
MT4 APU16 M16	1-16mm	130	M16
C20 STRAIGHT SHANK	1-13mm	110	

Products advantages

@ integrated design of the rob and collet,can avoid the collet and rob separate


@ High accuracy,strong grasp force,and high stability

@ Easy broken parts are dealt by quenching

@ Self-tightening,grasp the collet slightly,when drilling,graso force is enhancing with the torque increasing and develop obvious strong grasp force to prevent the drill remove

-- Can do dynamic balance est G6.3 G2.5

BT30 APU

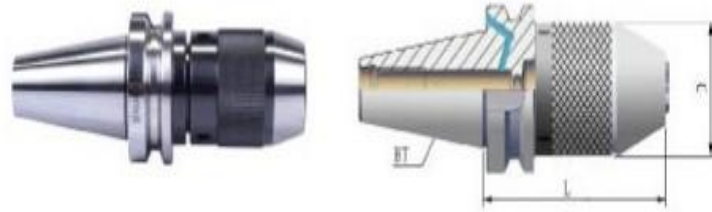

Order No	Model No	Clamping Range	D	L	
				Min	Max
11300880A	BT30-APU08-80	1-8	36.3	75	82
113013100A	BT30-APU13-100	1-13	51.5	97	104.5
11400885A	BT40-APU08-85	1-8	36.3	79	86.5
114013110A	BT40-APU13-110	1-13	51.5	98	109
114016130A	BT40-APU16-130	3-16	58	116	130
11500895A	BT50-APU08-95	1-8	36.3	90	97.5
115013120A	BT50-APU13-120	1-13	51.5	109	120
115013180A	BT50-APU13-180	1-13	51.5	169	180
115016130A	BT50-APU16-130	3-16	58	116	130
115016190A	BT50-APU16-190	3-16	58	176	190
应用范围：夹持直径：0.5-16mm的钻头					