

# HSK-FMB Face Milling Holder


## Brief introduction

High Speed HSK FMB Face Mill Collet Chuck, used in the clamping of the cutter with the radial drive groove, such as the face milling cutter, the vertical disc cutter, the set type end mill, high speed and high precision machining. Mechanical spindle and cutting tools and other accessories. High Precision HSK shank Tool Holder ,balanced G6.3 or G2.5 For choose.

HSK Tool Holders for mechanical spindle and cutting tool and other accessory tool connection. Is a simple, popular spindle shank connection standard, mainly HSK30 HSK40 HSK50... Etc.. Mold industry, and high-speed engraving machine, used more.

## Specifications

- 1, Material: 40Cr, 20CrMnTi
2. Type: FMA, FMB
- 3, Model: FMA25.4, FMA31.75, FMA38.1, FMA50.8  
FMB22, FMB27, FMB32, FMB40,
- 4, Accuracy: 0.005mm
- 5, Hardness: 52-58HRC
- 6, Usage: For holding like shell mill cutters
- 7, Standard: MAS403BT, DIN69871, CAT ANSI B5.50, DIN2080,
- 8, Surface; heat treatment, sand blasting

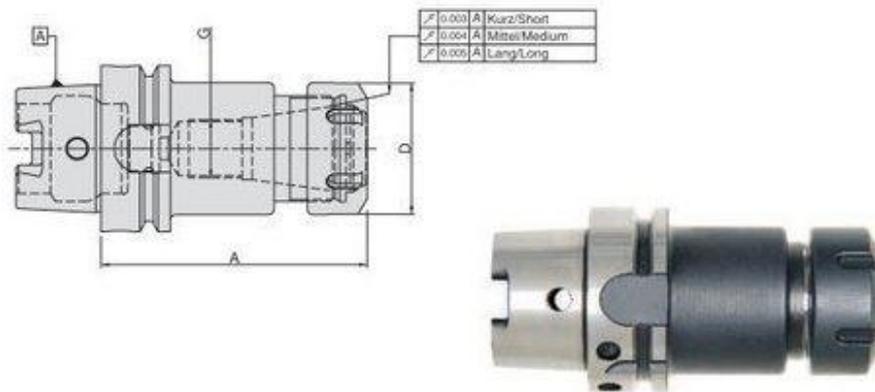

Model	d	A	l1	D
HSK50-FMB16-50	16	50	17	38
HSK50-FMB22-60	22	60	19	48
HSK50-FMB27-60	27	60	21	58
HSK50-FMB32-60	32	60	24	78
HSK63-FMB16-50	16	50	17	38
HSK63-FMB22-50	22	50	19	48
HSK63-FMB27-60	27	60	21	58
HSK63-FMB32-60	32	60	24	78
HSK63-FMB40-60	40	60	27	88
HSK63-FMB16-100	16	100	17	38
HSK63-FMB22-100	22	100	19	48
HSK63-FMB27-100	27	100	21	58
HSK63-FMB32-100	32	100	24	78
HSK63-FMB40-100	40	100	27	88
HSK80-FMB22-50	22	50	19	48
HSK80-FMB27-50	27	50	21	58
HSK80-FMB32-60	32	60	24	78
HSK80-FMB40-60	40	60	27	88
HSK100-FMB22-50	22	50	19	48
HSK100-FMB27-50	27	50	21	58
HSK100-FMB32-50	32	60	24	78
HSK100-FMB40-60	40	60	27	88
HSK100-FMB60-70	60	70	40	130