

SK C Power Collet Chucks

Brief introduction

SK Power Milling Chuck for Heavy Cutting, straight shank collet clamping tool for various sizes of cylindrical shank, high speed and high precision machining .Mechanical spindle and cutting tools and other accessories.High Precision SK shank Tool Holder ,balanced G6.3 or G2.5 For choose.

Specifications


1. ER spanner/wrench
2. Suitable to ER25/32/40/50UM Nut
3. Made in hardness steel
4. International quality standard
5. Suitable to all ER collet nut
6. International quality standard

Applications: Straight handle holder for clamping various sizes of cylindrical handle for high speed and high

Model	L	L1	L2	D	d1	d2
SK30-C20-85	132.8	85	70	50	20	55
SK30-C20-100	147.8	100	70	50	20	55
SK40-C20-85	153.4	85	70	63.55	20	55
SK40-C20-100	168.4	100	70	63.55	20	55
SK40-C20-135	203.4	135	70	63.55	20	55
SK40-C32-105	173.4	105	75	63.55	32	73
SK40-C32-135	203.4	135	75	63.55	32	73
SK50-C20-105	206.75	105	70	97.5	20	55
SK50-C20-150	251.75	150	70	97.5	20	55
SK50-C32-105	206.75	105	75	97.5	32	73
SK50-C32-110	211.75	110	75	97.5	32	73
SK50-C32-135	236.75	135	75	97.5	32	73
SK50-C42-110	211.75	110	90	97.5	42	95



Order No	Model	d1	d2	L1	L2	W (KGS)
22302085C	SK30-SC20-85	20	55	85	70	1.9
223020100C	SK30-SC20-100	20	55	100	70	2.1
22402085C	SK40-SC20-85	20	55	85	70	2.4
224020100C	SK40-SC20-100	20	55	100	70	2.5
224020135C	SK40-SC20-135	20	55	135	70	2.8
224032105C	SK40-SC32-105	32	73	105	75	2.7
224032135C	SK40-SC32-135	32	73	135	75	3.0
225020105C	SK50-SC20-105	20	55	105	70	4.5
225020150C	SK50-SC20-150	20	55	150	70	4.9
225032110C	SK50-SC32-110	32	73	110	75	5.2
225032135C	SK50-SC32-135	32	73	135	75	5.9
225042110C	SK50-SC42-110	42	95	110	90	6.0
应用范围：配直柄筒夹可夹持各种尺寸直柄刀具用于高速及高精度加工						

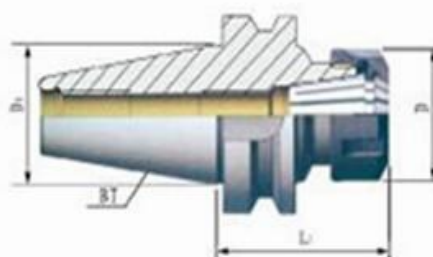

Order No.	Model	D	D1	L1	Clamping Range	Wt (kg)
11302060	BT30xER20-70	35	31.75	70	0.5-13	0.55
11302560	BT30xER25-70	42	31.75	70	0.5-16	0.58
11303260	BT30xER32-70	50	31.75	70	1-20	0.85
11304080	BT30xER40-80	63	31.75	80	2-26	1.10
11401670	BT40xER16-70	32	44.45	70	0.5-10	1.14
11402070	BT40xER20-70	35	44.45	70	0.5-13	1.16
114020100	BT40xER20-100	35	44.45	100	0.5-13	1.38
114020130	BT40xER20-130	35	44.45	130	0.5-13	1.76
11402570	BT40xER25-70	42	44.45	70	0.5-16	1.22
114025100	BT40xER25-100	42	44.45	100	0.5-16	1.52
114025130	BT40xER25-130	42	44.45	130	0.5-16	1.90
114025160	BT40xER25-160	42	44.45	160	0.5-16	2.10
11403270	BT40xER32-70	50	44.45	70	1-20	1.30
114032100	BT40xER32-100	50	44.45	100	1-20	1.72
114032130	BT40xER32-130	50	44.45	130	1-20	2.05
114032160	BT40xER32-160	50	44.45	160	1-20	2.58
11404070	BT40xER40-80	63	44.45	80	2-26	1.45
114040100	BT40xER40-100	63	44.45	100	2-26	2.01
114040160	BT40xER40-160	63	44.45	160	2-26	3.29
11501670	BT50xER16-70	28	69.85	70	0.5-10	3.64
11502070	BT50xER20-70	35	69.85	70	0.5-13	3.67
115020100	BT50xER20-100	35	69.85	100	0.5-13	3.84
11502570	BT50xER25-70	42	69.85	70	0.5-16	3.70
115025100	BT50xER25-100	42	69.85	100	0.5-16	4.54
11503270	BT50xER32-70	50	69.85	70	1-20	3.73
115032100	BT50xER32-100	50	69.85	100	1-20	5.20
115032160	BT50xER32-160	50	69.85	160	1-20	4.97
115032200	BT50xER32-200	50	69.85	200	1-20	5.48
11504070	BT50xER40-80	63	69.85	80	2-26	3.76
115040100	BT50xER40-100	63	69.85	100	2-26	4.44
115040160	BT50xER40-160	63	69.85	160	2-26	5.77
115040200	BT50xER40-200	63	69.85	200	2-26	6.66

应用范围：配DIN6499弹簧夹头可夹持各种尺寸直柄刀具