

BT-SLB End Mill Holder Weldon Holder

1. model No. : BT30, BT40, BT50

2, The Accuracy: 0.005mm

3, Material: 40Cr, 20CrMnTi, it can be made carburization treatment

4, The hardness: 52-58HRC

5, The model: SLB6, SLB8, SLB10, SLB12, SLB16. SLB20. SLB25. SLB32. SLB40

6, The usage: For clamping cutters with straight shank and inclined flat of DIN1835-B and DIN6535-HB


7, The coolant: AD, B, AD+B type

8, Taper: AT3 Standard

9, The Side lock holder can be made dynamic balancing G6.3/12000rpm, G2.5/25000rpm and so on

10. Packaging Detail: Plastic boxes, cartons

11. Delivery Detail: 15-20 days after receiving the deposit and all package information confirmed.

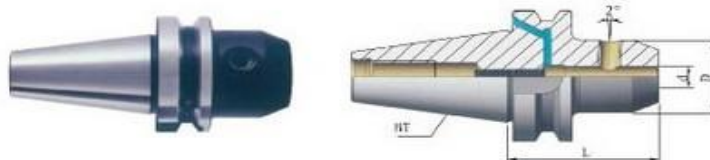

Order No	Model NO.	d	D	L
11400650SB	BT40-SLB06-50	6	25	50
11400850SB	BT40-SLB08-50	8	28	50
11401063SB	BT40-SLB10-63	10	35	63
11401263SB	BT40-SLB12-63	12	42	63
11401463SB	BT40-SLB14-63	14	44	63
11401663SB	BT40-SLB16-63	16	48	63
11401863SB	BT40-SLB18-63	18	50	63
11402063SB	BT40-SLB20-63	20	52	63
11402590SB	BT40-SLB25-90	25	65	90
114032100SB	BT40-SLB32-100	32	72	100
114040120SB	BT40-SLB40-120	40	80	120
11500663SB	BT50-SLB06-63	6	25	63
11500863SB	BT50-SLB08-63	8	28	63
11501063SB	BT50-SLB10-63	10	35	63
11501280SB	BT50-SLB12-80	12	42	80
11501480SB	BT50-SLB14-80	14	44	80
11501680SB	BT50-SLB16-80	16	48	80
11501880SB	BT50-SLB18-80	18	50	80
11502080SB	BT50-SLB20-80	20	52	80
115025100SB	BT50-SLB25-100	25	65	100
115032105SB	BT50-SLB32-105	32	72	105
115040110SB	BT50-SLB40-110	40	80	110

应用范围：适用于夹持DIN1835-E具有侧固平面的刀具